




EXCAVADORA DE ORUGA ZE60E-10



ZOOMLION

EXCAVADORA DE ORUGA ZE60E-10

	Ítem	Unidades	ZE60E-10
Datos Técnico Básico	Peso operativo	kg	5950
	Capacidad estándar	m ³	0.23
	Velocidad de giro	r/min	10.8
	Velocidad de desplazamiento (baja/alta)	km/h	4.2/2.3
	Fuerza de tracción máxima	kN	54.2
	Fuerza de excavación del cucharón	kN	45.5
	Fuerza de excavación de la pluma	kN	28.5
Motor	Fabricante del motor	-	YANMAR
	Modelo de motor	-	4TNV94L-BVTY2C
	Potencia nominal	kW/rpm	36.2/2100
	Cilindrada	L	3.054
	Estándar de emisiones	-	EU Stage IIIA
Dimensión	Longitud	mm	5880
	Ancho	mm	1900
	Altura	mm	2628
	Radio de giro de la cola	mm	1700
	Ancho de vía	mm	1500
	Longitud de la cadena sobre el terreno	mm	1930
Rango de Operación	Radio de excavación máximo	mm	6160
	Alcance de excavación máximo	mm	5960
	Profundidad de excavación máxima	mm	3850
	Altura de excavación máxima	mm	5790
	Altura de descarga máxima	mm	3980

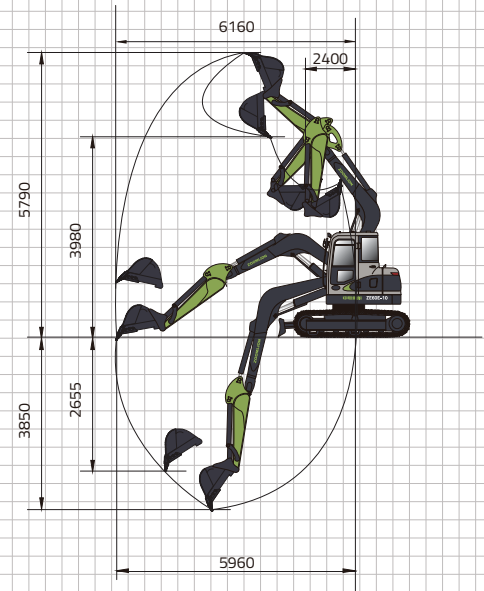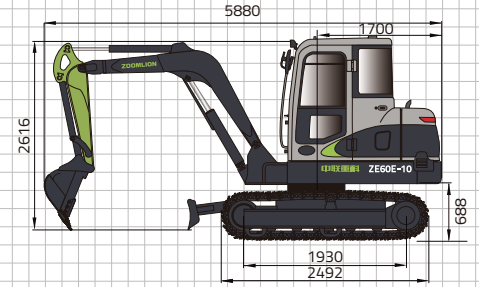

ZOOMLION

Zoomlion Heavy Industry Science & Technology Co.,Ltd.

Add: No.361, South Yinpen Road, Changsha, Hunan Province, P.R.China 410013

Email: earthmoving@zoomlion.com

Copyright©2021 Zoomlion. All rights reserved. Reproduction and copying of any part of contents is not allowed for any purposes without Zoomlion's approval.

Note: Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Zoomlion dealer for available options.

